



## Specification Parameter

Basic parameters	
Dimension	275.7 x 187.5 x 24.5mm
Weight	Device unit 1000g
Device Color	Black
LCD	10.1 inch IPS 16:10, 800x1280, 700nits
Touch Panel	10 point G-G capacitive touch screen
Camera	Front 5.0MP Rear 13.0MP
I/O	USB 2.0 Type-A x 1, USB Type-C x 1, SIM Card x 2, TF Card x 1, 12PIN Pogo Pin x 1, Φ3.5mm standard earphone jack x 1, Φ3.5mm DC jack x 1
Power	AC100V - 240V, 50Hz/60Hz, Output DC 5V/3A
Communication	
WIFI	WIFI 802.11 b/g/n/a/ac, 2.4G+5G dual-band WIFI
Bluetooth	BT5.2, Transmission distance: 10m
2G/3G/4G (Optional)	GSM: B2/B3/B5/B8 WCDMA: B1/B2/B5/B8 TDD: B38/B39/B40/B41N FDD: B1/B2/B3/B4/B5/B7/B8/B17/B20/B28a/B28b
GNSS	Built-in GPS-Glonass-Beidou

Performance parameter	
CPU	ARM (Octa-Core), 2.0GHz
OS	Android 12 (GMS)
RAM	8GB
ROM	128GB
Battery	
Capacity	3.7V/8000mAh
Type	Built-in Li-polymer battery
Endurance	8hrs ( 50% volume sounds, 200 lumens brightness, 1080P HD video display by default )
Data Collection	
NFC	Built-in, 13.56MHz, Support ISO/IEC 14443A protocol Card reading distance: 4cm
2D	Optional, Optical resolution: 5mil/ scan speed: 50 times/s
Reliability	
Operate Temperature	-10 °C ~ 50 °C
Store Temperature	-20 °C ~ 60 °C
Humidity	95% Non-Condensing
Rugged Feature	IP65 certified, MIL-STD-810G certified
Drop Height	1.22m

## Accessories



Docking Charger



Hand-strap



Vehicle Mount



5V3A Car Charge

## Application Range

Various modules and accessories can be selected to meet customers' application in various industries.




Outdoor Exploration



Military Equipment



Finance

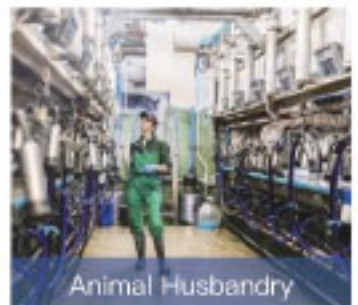

Animal Husbandry